



MICROBIAL FUEL CELL WITH Cu-B CATHODE AND KMnO₄ CATHOLYTE

Barbara Włodarczyk¹, Paweł P. Włodarczyk¹

¹ University of Opole

Abstract

The increasing of standard living causes the increases energy consumption and waste or wastewater production. The possibility to combine wastewater treatment and electricity production can accomplish a microbial fuel cell. The possibility of wastewater treatment using the Cu-B catalyst with KMnO₄ catholyte for microbial fuel cells is presented in this paper. The measurements covered comparison of changes in the concentration of COD, NH₄⁺ and NO₃[–] in the reactor without aeration, with aeration and with using a microbial fuel cell (with Cu-B cathode and KMnO₄ catholyte). The reduction time for COD with the use of microbial fuel cell with the Cu-B catalyst (and KMnO₄ catholyte) is similar to the reduction time with aeration. It has been shown that the Cu-B (with KMnO₄ catholyte) can be used as cathode catalyst in microbial fuel cells. Unfortunately in this case is needed to constant delivery of catholyte

Keywords: microbial fuel cell, wastewater treatment, cathode, Ni-Co alloy, renewable energy sources, environment protection, clean technology, sustainable development

INTRODUCTION

Wastewater treatment systems with activated sludge and aeration of wastewater can efficiently remove organic pollutants, but such systems are cost and

energy intensive. The United States spends approximately \$23 billion annually on domestic wastewater treatment (US EPA 2008). So, it is important to reduce of wastewaters treatment costs. Technical device that can accomplish this task are microbial fuel cells (MFCs) (Logan 2008). The concept of MFC was created the 1960's (Davis and Yarbrough 1962). In MFC bacteria can be used for electricity production during wastewater treatment. Bacteria that were identified as capable of creating electricity in microbial fuel cell include a wealth of genera of bacteria e.g. *Geobacter*, *Shewanella* or *Pseudomonas* (Bond and Lovley 2003; Chaudhuri and Lovley 2003; Kim *at al.* 2002; Park *at al.* 2001; Pham *at al.* 2003). So, activated sludge is capable of producing electrons (e^-) and H^+ ions. MFCs are bio-electrochemical systems that are devices that use bacteria as catalysts to oxidize organic and inorganic matter and generate electric current (Berk and Canfield 1964; Logan 2008, Rabaey and Verstraete 2005). Electrons produced by the bacteria are transferred from the anode to the cathode through the electric current receiver. In MFC organic material is oxidized on anode, and the product of oxidation is carbon dioxide and electrons. Bacteria in the anode area transfer electrons to the electrode (anode). This occurs either through direct contact (by nanowires) or mobile electron shuttles. The electrons flow from the anode through an external resistance to the cathode. And next they react with oxygen and protons (Liu *at al.* 2004; Rabaey and Verstraete 2005; Wang *at al.* 2008). In MFC a catalyst of anode are microbes. So, it is important to find catalyst for cathode. In MFCs carbon is most often used as the electrode. It is also possible to use metal catalysts for electrodes of MFCs (Dumas *at al.* 2006; Martin *at al.* 2011). In real conditions the choice of catalyst is mainly carried out by experimental methods (Bockris and Reddy 2000, Twigg 1989). For this reason experimental researches on the search for new catalysts for MFCs have been conducted for a dozen or so years (Cheng *at al.* 2006; Dumas *at al.* 2006; Logan *at al.* 2006; Martin *at al.* 2011; Zhao *at al.* 2005; Włodarczyk and Włodarczyk 2015a; Włodarczyk and Włodarczyk 2015b; Włodarczyk and Włodarczyk 2015c; Włodarczyk and Włodarczyk 2015d; Włodarczyk and Włodarczyk 2016a; Włodarczyk and Włodarczyk 2016b; Włodarczyk and Włodarczyk 2016c; Włodarczyk and Włodarczyk 2016d; Włodarczyk and Włodarczyk 2016e; Włodarczyk and Włodarczyk 2017). Authors have attempted to demonstrate the possibilities of wastewater treatment using the Cu-B alloy as cathode catalyst for MFC and $KMnO_4$ as catholyte.

MATERIAL AND METHODS

The method of electrochemical deposition was chosen to obtain Cu-B alloy. The alloys were deposited on titanium electrode (mesh form). The alloys

were deposited from a mixture of mainly NaBH_4 and CuSO_4 (Włodarczyk and Włodarczyk 2016f). The alloys were obtained at temperature of 365K. Before the deposition of the alloy titanium electrode was degreased in 25% aqueous solution of KOH (after the degreasing the surface shall be completely wettable), digested in acetic acid and washed with alcohol. The chemical composition of Cu-B alloys was determined with the X-ray diffraction method (XRD). The alloy with 9% of B was selected for measurements.

The measurements have included changes in the concentration of COD, NH_4^+ and NO_3^- . The research was conducted in reactors with capacity equal 15l. Measurements of reduction of COD, NH_4^+ oraz NO_3^- – was conducted without aeration, with aeration and with using a MFC with Cu-B cathode and KMnO_4 catholyte. KMnO_4 was chosen as catholyte due the good oxidizing properties (Logan 2008). The temperature of measurements was equal 293K. The measurements were carried out to obtain 90% effectiveness of COD reduction (Huggins et al. 2013). The municipal wastewater was used in measurements. Table 1 shows the parameters of analysed wastewater.

Table 1. Parameters of analysed wastewater

parameter	value
pH	6,3
ChZT [mg/l]	2172
NH_4^+ [mg/l]	11
NO_3^- [mg/l]	3

Source: Own compilation

The figure 1 shows view of measurement position.

In the first reactor the wastewater had contact with air only by water mirror. In the second reactor the wastewater was aerated (270l/h) and in the third reactor the wastewater was treatment with MFC (with Cu-B cathode and KMnO_4 catholyte). The carbon electrode was used as anode. The MFC was loaded with resistance equal 10Ω . The cover was printed on the 3D printer (layer thickness was equal $290\mu\text{m}$). The Nafion 117 was used as PEM. The cathode was immersed in KMnO_4 catholyte. Figure 2 shows view and scheme of cathode in ABS cover.

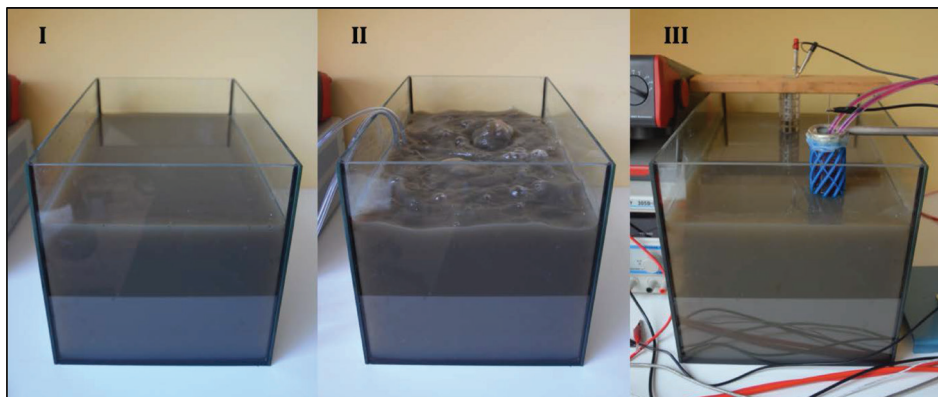


Figure 1. View of measurement position: I – without aeration, II – with aeration, III – MFC with Cu-B cathode and KMnO_4 catholyte [own compilation]

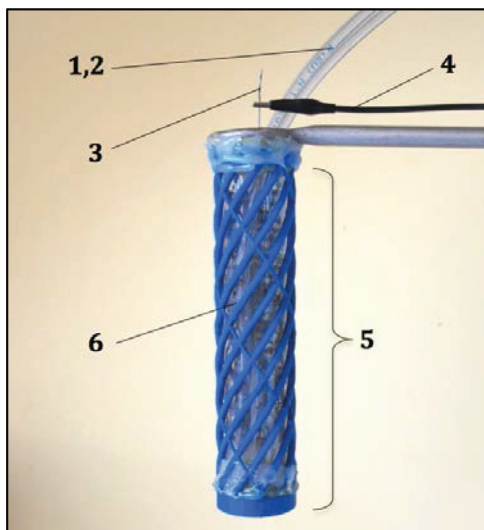


Figure 2. View of cathode in ABS cover [own compilation]
1,2 – inflow and outflow of KMnO_4 catholyte, 3 – cathode connector,
4 – electrical connection, 5 – ABS cover (blue), 6 – PEM.

RESULTS

Figure 3-5 shows the measurements of change of COD, NH_4^+ and NO_3^- concentration. All measurements were carried out at a temperature of 293K.

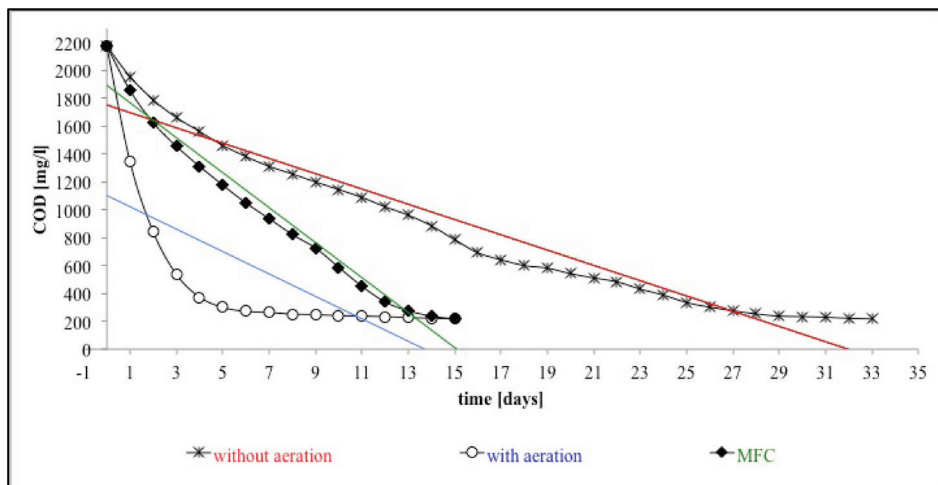


Figure 3. Change of concentration of COD during municipal wastewater treatment without aeration, with aeration and with using a MFC (with Cu-B cathode and KMnO_4 catholyte). The colours indicate the trend lines of individual data [own compilation]

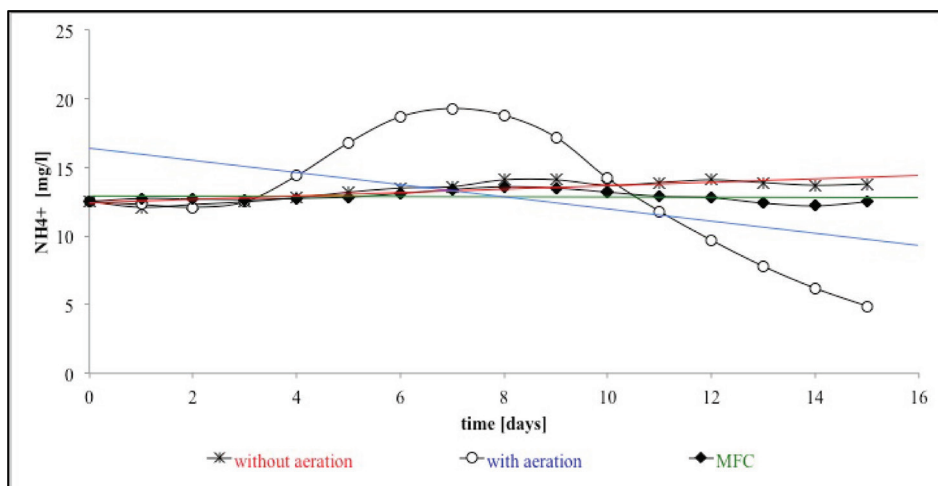


Figure 4. Change of concentration of NH_4^+ during municipal wastewater treatment without aeration, with aeration and with using a MFC (with Cu-B cathode and KMnO_4 catholyte). The colours indicate the trend lines of individual data [own compilation]

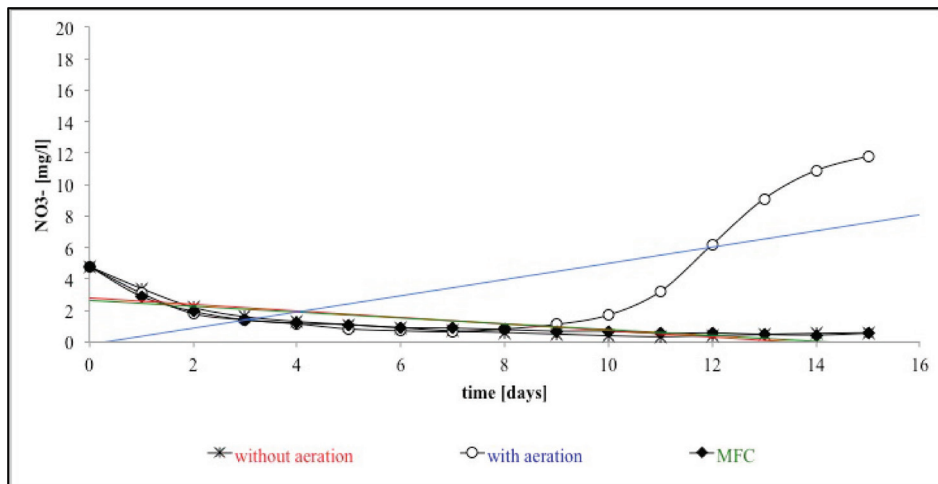


Figure 5. Change of concentration of NO_3^- – during municipal wastewater treatment without aeration, with aeration and with using a MFC (with Cu-B cathode and KMnO_4 catholyte). The colours indicate the trend lines of individual data [own compilation]

CONCLUSIONS

In any cases (without aeration, with aeration and with MFC) the reduction of COD was 90% (fig. 3). So, measurements have shown the effectiveness of COD reduction. The reduction time for COD with the use of MFC (with Cu-B cathode and KMnO_4 catholyte) is similar to the reduction time with aeration (15 days) to obtain 90% effectiveness. But, unfortunately in this solution (MFC with KMnO_4) is needed to constant delivery of catholyte. The characteristics of curves are different in any cases. The characteristic curve of aeration is more preferred than characteristic curve of MFC (with Cu-B cathode and KMnO_4 catholyte) because about 80% effectiveness of COD reduction after about 4 days. The measurement of NH_4^+ reduction shows almost no changes in cases measurement in MFC (fig. 4). The measurements (fig. 5) have shown also the effectiveness (about 90%) of NO_3^- – reduction. Increasing of NH_4^+ concentration (during aeration) results from the attachment of hydrogen molecule to the ion ammonia (e.g. during putrefaction) (fig. 4) (McMurry et al. 2009). The increase of NO_3^- – concentration (fig. 5) is the result of nitrification during the growth of bacteria (Łomotowski and Szpindor 2002). It has been shown that the Cu-B (with KMnO_4 catholyte) can be used as cathode catalyst in microbial fuel cells.

REFERENCES

- Berk R.S., Canfield J.H., (1964). Bioelectrochemical energy conversion, *Applied and Environmental Microbiology*, 12:10-12.
- Bockris, J.O.M., Reddy, A.K.N. (2000). *Modern electrochemistry*, New York: Kulwer Academic /Plenum Publishers.
- Bond, D.R., Lovley, D.R. (2003). Electricity production by *Geobacter sulfurreducens* attached to electrodes. *Appl. Environ. Microbiol.*, 69:1548-1555.
- Chaudhuri, S.K., Lovley, D.R. (2003). Electricity generation by direct oxidation of glucose in mediatorless microbial fuel cells. *Nat. Biotechnol.*, 21:1229-1232.
- Cheng, S., Hong Liu, H., Logan, B.E. (2006) Power Densities Using Different Cathode Catalysts (Pt and CoTMPP) and Polymer Binders (Nafion and PTFE) in Single Chamber Microbial Fuel Cells, *Environ. Sci. Technol.*, 40(1)364-369. DOI:10.1021/es0512071
- Davis, J.B., Yarbrough, H.F. (1962). Preliminary experiments on a microbial fuel cell. *Science*, 137:615-616.
- Dumas, C., Mollica, A., Féron, D., Basséguy, R., Etcheverry, L., Bergel, A. (2006). Marine microbial fuel cell: Use of stainless steel electrodes as anode and cathode materials, *Electrochimica Acta*, 53(2):468-473. DOI:10.1016/j.electacta.2007.06.069
- Huggins ,T., Fallgren, P.H., Jin, S., Ren, Z.J., (2013). Energy and performance comparison of microbial fuel cell and conventional aeration treating of wastewater, *J. Microb. Biochem. Technol.*, S6:002. DOI: 10.4172/1948-5948.S6-002.
- Kim, H.J., Park, H.S., Hyun, M.S., Chang, I.S., Kim, M., Kim, B.H. (2002). A mediator-less microbial fuel cell using a metal reducing bacterium, *Shewanella putrefaciens*. *Enzyme Microbiol. Technol.*, 30:145-152.
- Liu, H., Ramnarayanan, R., Logan, B.E. (2004). Production of electricity during wastewater treatment using a single chamber microbial fuel cell. *Environ. Sci. Technol.* 38:2281-2285.
- Logan, B.E. (2008). *Microbial fuel cell*, Wiley & Sons.
- Logan, B.E., Hamelers, B., Rozendal, R., Schroder, U., Keller, J., Verstraete, W., Rabaey, K. (2006). Microbial Fuel Cells: Methodology and Technology, *Environ. Sci. Technol.*, 40(17):5181-5192. DOI: 10.1021/es0605016
- Łomotowski, J., Szpindor, A. (2002). *Nowoczesne systemy oczyszczania ścieków*, Arkady, Warszawa.
- Martin, E., Tartakovsky, B., Oumarou Savadogo, O. (2011). Cathode materials evaluation in microbial fuel cells: A comparison of carbon, Mn₂O₃, Fe₂O₃ and platinum materials, *Electrochimica Acta*, 58:58-66. DOI:10.1016/j.electacta.2011.08.078
- McMurry, J.E., Ballantine D.S., Hoeger, C.A., Peterson, V.E., Castellion, M.E. (2009). *Fundamentals of Inorganic, Organic and Biological Chemistry*, Pearson, London.

Park, H.S., Kim, B.H., Kim, H.S., Kim, H.J., Kim, G.T., Kim, M., Chang, I.S., Park, Y.K., Chang, H.I. (2001). A novel electrochemically active and Fe(III)-reducing bacterium phylogenetically related to *Clostridium butyricum* isolated from a microbial fuel cell. *Anaerobe*, 7:297-306.

Pham, C.A., Jung, S.J., Phung, N.T., Lee, J., Chang, I.S., Kim, B.H., Yi, H., Chun, J. (2003). A novel electrochemically active and Fe(III)-reducing bacterium phylogenetically related to *Aeromonas hydrophila*, isolated from amicrobial fuel cell. *FEMS Microbiol. Lett.*, 223:129-134. DOI: 10.1016/S0378-1097(03)00354-9

Rabaey, K., Verstraete, W. (2005). Microbial fuel cells: novel biotechnology for energy generation. *Trends Biotechnol.*, 23:291-298.

Twigg, M. V. (1989). *Catalyst handbook*. London: Wolfe Publishing Ltd..

US EPA (2008). Report, Clean watersheds needs survey overview.

Wang X., Feng, Y.J., Lee, H. (2008). Electricity production from beer brewery wastewater using single chamber microbial fuel cell. *Water Sci. Technol.*, 57:1117-1121.

Włodarczyk, B. & Włodarczyk, P.P. (2015a). Comparison of electrooxidation efficiency in microbial fuel cell with a steel catalyst and aeration in wastewater treatment (in Polish). *Engineering and Protection of Environment*, 18(2):189-198.

Włodarczyk, P.P. & Włodarczyk, B. (2015b). Ni-Co alloy as catalyst for fuel electrode of hydrazine fuel cell. *China-USA Business Review* 14(5):269-279. DOI: 10.17265/1537-1514/2015.05.005

Włodarczyk, P.P. & Włodarczyk, B. (2015c). Analysis of the possibility of using stainless steel and copper boride alloy as catalyst for microbial fuel cell fuel electrode. *Archives of Waste Management and Environmental Protection* 17(1):111-118.

Włodarczyk, B. & Włodarczyk, P.P. (2015d). Electricity production in microbial fuel cell with Cu-B alloy as catalyst of anode. *Civil engineering, QUAESTI 2015*, 305-308. DOI:10.18638/quaesti.2015.3.1.211

Włodarczyk, P.P., & Włodarczyk, B. (2016a). Possibility of wastewater treatment using MFC with Ni-Co catalyst of fuel electrode, *Civil And Environmental Engineering Reports*, 21(2):131-145. DOI: 10.1515/ceer-2016-0028

Włodarczyk, B. & Włodarczyk, P.P. (2016b). Mikrobiologiczne ogniwo paliwowe z katodą Cu-B, *Journal of Civil Engineering, Environment and Architecture*, XXXIII, 63(3):525-532.

Włodarczyk, B. & Włodarczyk, P.P. (2016c). Oczyszczanie ścieków w mikrobiologicznym ogniwie paliwowym z katodą z niklu Raney, *Diagnozowanie Stanu Środowiska, Metody Badawcze – Prognozy, Prace Komisji Ekologii i Ochrony Środowiska Bydgoskiego Towarzystwa Naukowego*, t.X, 183-192.

Włodarczyk, B. & Włodarczyk, P.P. (2016d). Wykorzystanie stopu NiCo_2O_4 jako katalizatora katody mikrobiologicznego ogniwa paliwowego, *Diagnozowanie Stanu Środowiska, Metody Badawcze – Prognozy, Prace Komisji Ekologii i Ochrony Środowiska Bydgoskiego Towarzystwa Naukowego*, t.X, 193-203.

Włodarczyk, B. & Włodarczyk, P.P. (2016e). Oczyszczanie ścieków w mikrobiologicznym ogniwie paliwowym z anodą Cu-B, *Wybrane zagadnienia z zakresu ochrony środowiska i energii odnawialnej*, Wydawnictwo Naukowe TYGIEL, 85-94.

Włodarczyk, B. & Włodarczyk, P.P. (2016f). Methanol electrooxidation with Cu-B catalyst, *Infrastructure and Ecology of Rural Areas*, PAN Kraków, 4(2):1483–1492. DOI: <http://dx.medra.org/10.14597/infraeco.2016.4.2.110>

Włodarczyk, B. & Włodarczyk, P.P. (2017). Wykorzystanie stopu Ni-Co jako katalizatora katody w jednokomorowym mikrobiologicznym ogniwie paliwowym, *Inżynieria Ekologiczna* 18(2):210-216. DOI: 10.12912/23920629/66991

Zhao, F., Harnisch, F., Schröder, U., Scholz, F., Bogdanoff, P., Herrmann, I. (2005). Application of pyrolysed iron(II) phthalocyanine and CoTMPP based oxygen reduction catalysts as cathode materials in microbial fuel cells, *Electrochemistry Communications*, 7(12):1405-1410. DOI:10.1016/j.elecom.2005.09.032

Dr Barbara Włodarczyk
Dr Paweł P. Włodarczyk
University of Opole
Department of Process Engineering
Dmowskiego Street 7-9
45-365 Opole
Poland
e-mail: barbara.wlodarczyk@uni.opole.pl

Received: 26.04.2017

Accepted: 10.11.2018